


Ashland

Large Capacity Grease Interceptors

The **Ashland APCI Series Grease Interceptor** is designed to separate grease, oils, fats and other sediment from large Commercial and Industrial sources. Made of seamless High Density Polyethylene (HDPE), the APCI series interceptor is lightweight, cost efficient, extremely durable and corrosion free. Non skid 3/4" poly covers with recessed handles are standard, but all units are available with steel non-skid tread plates for traffic areas. The HDPE construction is acid resistant and solids do not easily adhere to the smooth walls, making cleaning effortless.

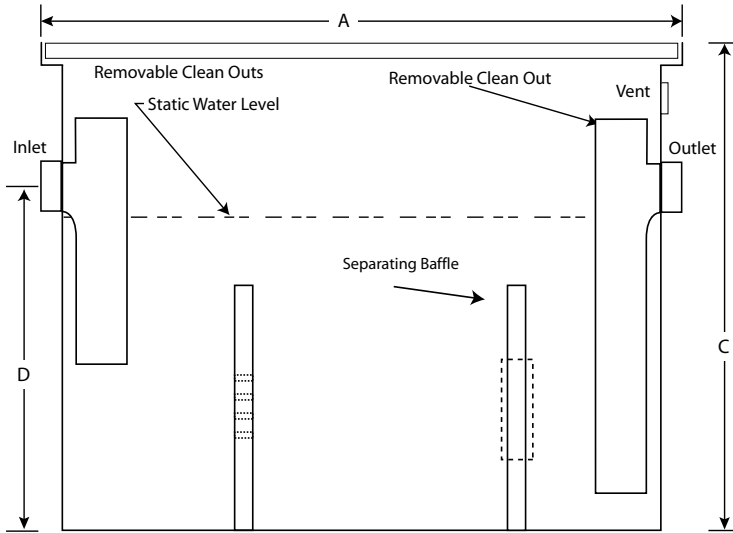

*Design varies slightly by model

Options Include:

- Above or below ground installation
- 1/4" Steel Cover for pedestrian traffic
- Bolt on Extension.
- Sediment Basket
- Optional Connection Sizes 2, 3, 4, 6 inch
- PVC glued connections are standard.
- HD Braces for above ground installation.

Special sizes available to fit through narrow passages or existing walkways. Special units also available to meet larger capacities, including systems that utilize series and/or parallel interceptors. Straight through, left, and right hand models available.

DIMENSIONS & SPECIFICATIONS (B = Width - All dimensions approx. due to plastic variances)

Model Number		APGI-100	APGI-150	APGI-200	APGI-250	APGI-350
Flow Rate G.P.M.		100	150	200	250	350
Grease Capacity (lbs.)		250	387	455	625	850
Approximate Dimensions (inches)	Length (A)	52.5	52	41.5	77	77
	Width (B)	29	32.5	41	41	41
	Height (C)	32	42.5	44.5	49.5	61
Bottom of Unit to center of Inlet/ Outlet (D)		24	35	37	42	53
Bottom of Unit to center of vent		NA	34	40	45	57.5
Vent Connection (in.)		NA	2	2	2	2
Approximate Weight (lbs.)		200	350	400	475	650
Standard Inlet/Outlet (in.)		3"	4"	4"	4"	6"
Liquid Holding Capacity (gal)		112	186	218	405	560

Call about small standard size Interceptors / Traps for grease, oil, solids, lint & hair.

Ashlandpolytraps.com

PH. 800.541.8004 ~ email: polytraps@amplex.net ~ Fax. 419.836.4140



Ashland

Lint and Sediment Interceptors

The Ashland AP Series Lint and Solids Interceptor is designed to capture lint and other sediment from commercial washing machines and other drain sources. Made of seamless High Density Polyethylene (HDPE), the AP series interceptor is lightweight, cost efficient, extremely durable and corrosion free. Non Skid poly covers are standard. All units are available with diamond tread plates for heavy foot traffic areas. The HDPE construction can withstand the corrosive effluent from laundry waste and the smooth walls make cleaning effortless.

Options Include:

- Above or below ground installation
- ¼" steel covers for pedestrian traffic
- 3/16" Aluminum overlays for light foot traffic
- Bolt on extensions
- Optional connections sizes 2,3,4,6 inch
- HD braces required on larger models for above ground installation.
- Recessed lift handles standard on ¾" poly lids for 100-350.

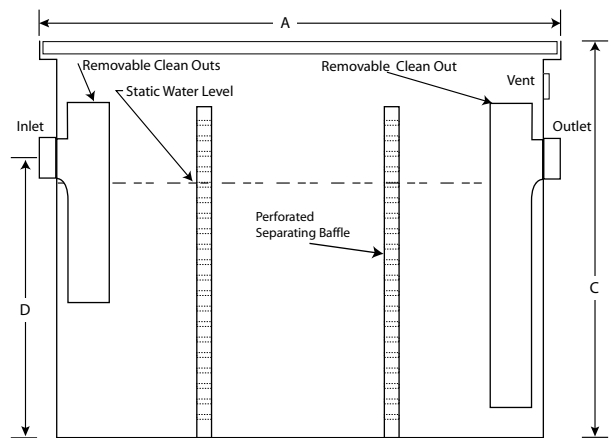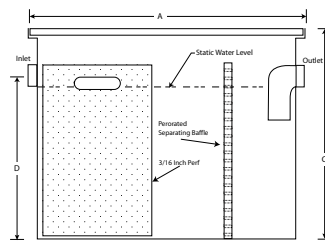

*Design varies slightly by model

DIMENSIONS & SPECIFICATIONS (B = Width - All dimensions approx. due to plastic variances)

Model Number Lint Interceptor	APLI-10-1	APLI-25-3	APLI-50-7	APLI-75-10	APLI-100-30	APLI-150-35	APLI-200-45	APLI-250-50	APLI-350-70
Model Number Sediment Interceptor	APSI-10	APSI-25	APSI-50	APSI-75	APSI-100	APSI-150	APSI-200	APSI-250	APSI-350
Number of Machines	1	3	7	10	30	35	45	50	70
Flow Rate G.P.M.	10	30	70	100	300	350	450	500	700
Approximate Dimensions (inches)	Length (A)	21	27.5	37	44	52.5	52	41.5	77
	Width (B)	15	21.75	25	25	29	32.5	41	41
	Height (C)	13.5	20	18.75	24.75	32	42.5	44.5	49.5
Bottom of Unit to center of Inlet/Outlet (D)	8.5	14.5	14.5	20.5	23	35	37	42	53
Bottom of Unit to center of vent 2"	NA	NA	NA	NA	NA	40	45	45	57.5
Standard inlet/outlet connection	2"	2"	2"	3"	4"	4"	4"	6"	6"
Approximate Weight (lbs.)	25	40	65	80	225	325	425	525	675
Basket with 1/4" perf.	Y	Y	Y	Y	N	N	N	N	N
Removable Baffles 3/16" perf.	N	N	Y	Y	Y	Y	Y	Y	Y
Fixed baffle 3/16" perf.	Y	Y	N	N	N	N	N	N	N

Call about small standard size Interceptors / Traps for grease, oil, solids, lint & hair.

Ashlandpolytraps.com

PH. 800.541.8004 ~ email: polytraps@amplex.net ~ Fax. 419.836.4140